



New flexbox® Products:

Allied Moulded Product's flexbox® line has been expanded to include the PC2440W and PC2440WG four-inch, round outlet old work boxes. Our flexbox products were developed for the electrical contractor looking for boxes with "soft box" characteristics.

PC2440W/PC2440WG Features:

- Round design for easy wall cut-in
- UL® listed for use in 2-hour fire resistive wall assemblies
- Steel wing brackets for secure box mounting
- Molded spline fixture holes for #8-32 mounting screws
- Integral molded-in Speed Klamps™ (US Pat. No. 6365831 B1)
- Two ½" cable connector knockouts
- PC2440WG includes a ground strap (shown in the photo to the right)



flexBOX Old Work Product Line Features

Wall Box Features


- Square corner, rectangular exterior profile design for easy wall cut-in
- UL® listed for use in 2-hour fire resistive wall assemblies
- Steel wing brackets for secure box mounting
- Molded spline device holes
- Large cubic inch capacity design
- Integral molded-in Speed Klamps™
- ½" cable connector knockouts

Round Box Features

- Round exterior design for easy wall cut-in
- Mounting flange and steel bracket for secure box mounting
- UL® listed for use in 2-hour fire resistive walls
- Molded spline fixture holes
- Large cubic inch capacity design
- Integral Speed Klamps™

Other Old Work Box Features

- Two and three gang boxes allow use of a low voltage partition for line and low voltage applications

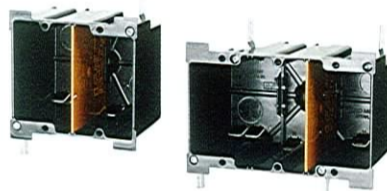

ALLIED MOULDED PRODUCTS, Inc.

222 North Union Street
Bryan, OH 43506 USA

Ph: 1-800-722-2679
Fax: 1-800-237-7269
www.alliedmoulded.com



flexBOX Single Gang Old Work



Cu. In. Volume	Catalog Number	Component Description	D	W	H	UPC# 85339	Std. Pkg. Qty.	Std. Wt. (lb.)
8.0	P-108E	Single gang with ears, wire knockouts	1-¼	2-¼	3-11/16	24917	24	3
16.0	P-1160W	Single gang with ears, wing brackets, ½" NM Knockout, molded-in Speed Klamps™	2-11/16	2-¼	3-11/16	24915	48	9
18.0	P-1180W	Single gang with ears, wing brackets, ½" NM Knockout, molded-in Speed Klamps™	3	2-¼	3-11/16	92714	48	11
22.5	P-1220W	Single gang with ears, wing brackets, ½" NM Knockout, molded-in Speed Klamps™	3-¾	2-¼	3-11/16	24913	48	12

flexBOX Multi-Gang Old Work



Cu. In. Volume	Catalog Number	Component Description	D	W	H	UPC# 85339	Std. Pkg. Qty.	Std. Wt. (lb.)
40.0	P-2400W	Double gang with ears, wing brackets, ½" NM Knockouts, molded-in Speed Klamps™	3-3/8	4-1/8	3-11/16	24912	24	8
55.0	P-3520W	Three gang with ears, wing brackets, ½" NM Knockouts, molded-in Speed Klamps™	3-3/8	5-15/16	3-11/16	33201	12	5
—	LVP-2*	Low voltage partition for use with P-2400W and P-3520W only	—	—	—	80005	50*	3

*Consists of five (5) packages of ten (10) pieces each.

flexBOX Round Outlet Old Work



Cu. In. Volume	Catalog Number	Component Description	Depth	Dia.	Fixture Rating	UPC# 85339	Std. Pkg. Qty.	Std. Wt. (lb.)
21.5	PC2230W	3-½" round outlet with snap bracket, molded-in Speed Klamps™	2-13/16	3-½	□	98028	24	9
21.5	PC2230WG	3-½" round outlet with snap bracket, ground strap, molded-in Speed Klamps™	2-13/16	3-½	□	98029	24	10
24.5	PC2440W	4" round outlet with wing brackets, molded-in Speed Klamps™, two ½" knockouts	3	4	□	98311	24	7
24.5	PC2440WG	4" round outlet with wing brackets, molded-in Speed Klamps™, two ½" knockouts	3	4	□	97418	24	7

□ Meets NEC for wall applications

flexBOX Available Product Lines Include:

- Nail-on Wall Boxes
- Face-bracketed Wall Boxes
- 3-½" and 4" Round Ceiling New Work Boxes
- Low Voltage/Structured Cable Products
- 4-inch Square Junction Boxes and Covers