
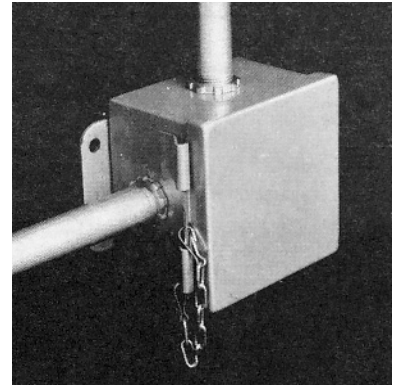
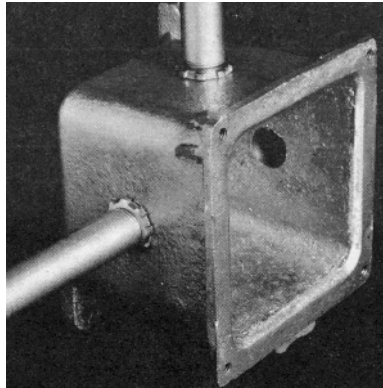


CP Sealing Locknuts

UL File No. E-19189

CP Sealing Locknuts



U.S. Patent #4022262

- Integrally fused PVC gasket provides positive seal against water, oils and other liquids.
- Designed for use with raintight, watertight and oiltight enclosures, NEMA 2, 3, 3R, 4 and 12.

Only one Sealing Locknut is required to:

- functionally replace rigid threaded enclosure connectors.
- provide raintight, watertight, or oiltight seal in any position.
- provide positive ground connection.
- provide economies in installation and fitting costs.
- UL Listed Raintight.
- UL Listed Liquidtight.
- Can be used with either sheet metal or standard cast metal boxes.
- CSA Certified watertight.
- 1/2" – 2" Heavy-duty steel.
- 2 1/2" – 6" Malleable iron.

Cat. #	Size	Unit Quantity	Standard Package	Weight Lbs. Per 100
SL1	1/2"	100	100	2
SL2	3/4"	50	500	2
SL3	1"	25	250	3
SL4	1 1/4"	25	250	8
SL5	1 1/2"	25	100	10
SL6	2"	25	100	14
SL7	2 1/2"	10	50	36
SL8	3"	10	50	38
SL9	3 1/2"	10	50	58
SL10	4"	5	25	72
SL11	5"	2	2	110
SL12	6"	1	1	190