




Standard Grade Switches 15A 120V/AC

AC Quiet Switches – Framed Toggle

FEATURES


- Longer, wider strap provides 40% more contact area to wall board. Virtually eliminates floating installations.
- Industrial design cam action mechanism insures quiet switch action.
- Patented built-in wire stripper for #14 and #12 wire to speed installation.
- Unbreakable top and bottom housing eliminates call-backs due to job site breakage.
- Patented built-in wire looper for pre-looping.
- Three way switches feature additional push-in common termination for feed-through tapping.
- Push-in terminals accept #14 solid wire only.
- Side wire terminals accept up to #10 solid or stranded wire.
- Tri-combo screws accept slotted-, Phillips, and Robertson-head tools for installations in both the U.S. and Canada.

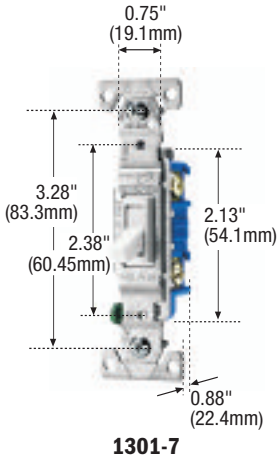

Non-Grounding Switch – Side Wire and Push Wire

Rating A	V/AC	Description	Color	Catalog No.	
				Single-Pole	3-Way
15	120	Framed Toggle	Brown	1301B†	1303B†
			Ivory	1301V†	1303V†
			White	1301W†	1303W†

†Not CSA

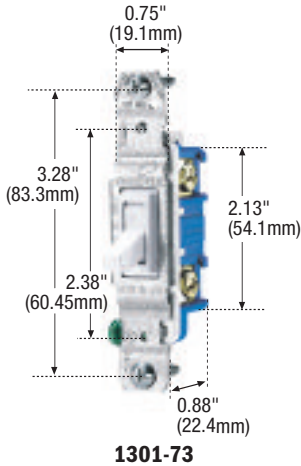

Grounding Switch – Side Wire and Push Wire

Rating A	V/AC	Description	Color	Catalog No.		
				Single-Pole	3-Way	4-Way
15	120	Framed Toggle	Almond	1301-7A†	1303-7A†	1242-7A†*
			Brown	1301-7B†	1303-7B†	1242-7B†*
			Ivory	1301-7V†	1303-7V†	1242-7V†*
			Light Almond	1301-7LA†	1303-7LA†	1242-7LA†*
			White	1301-7W†	1303-7W†	1242-7W†*
15	120	Less Ears	Brown	1301-73B†	–	–
			Ivory	1301-73V†	–	–
			White	1301-73W†	–	–

†Not CSA

*Side wire only

AC Quiet Switches – Lighted Toggle

FEATURES

- Lighted toggle glows in “off ” position.
- Exclusive color matching toggle and dust apron.

Lighted Toggle Grounding Switch – Side Wire and Push Wire

Rating A	V/AC	Description	Color	Catalog No.	
				Single-Pole	3-Way
15	120	Lighted	Almond	1301-7LTA	1303-7LTA
			Ivory	1301-7LTV	1303-7LTV
			Light Almond	1301-7LTLA	1303-7LTLA
			White	1301-7LTV	1303-7LTV

Horsepower Rated for Motor Loads per UL 20

	120V/AC	240V/AC	Max Amps
15A	1/2 HP	2 HP	12A

E-11 Switches

TESTING & CODE COMPLIANCE

- UL 20 Listed, file no. E18704 (1301, 1301-7, 1301-7LT, 1303, 1303-7, 1303-7LT).
- cULus Listed, file no. E18704 (1242-7).
- Meets all CSA requirements, C22.2 111 file no. 10016 (1301-7LT, 1303-7LT).
- NOM Certified.

MATERIAL CHARACTERISTICS

Temperature Rating:
-20°C to 60°C.