




CO/ALR Switches – Framed Toggle

FEATURES

- For direct connection to aluminum or copper wire.
- Longer, wider strap provides 40% more contact area to wall board. Virtually eliminates floating installations.
- Industrial design cam action mechanism insures quiet switch action.
- Side wire terminals accept up to #10 solid or stranded copper wire, and up to #10 solid aluminum wire.
- Terminal screws backed out – ready for wiring.
- Combination slot/Phillips head mounting and terminal screws ease installation (slot/Robertson screws in Canada where available).

Copal (CO/ALR) Grounding Switch – Side Wire

| Rating A | V/AC | Description | Color | Catalog No. | |
|-------------|------|-------------|-------|-------------|---------|
| | | | | Single-Pole | 3-Way |
| 15 | 120 | CO/ALR | Brown | 5221-7B | 5223-7B |
| | | | Ivory | 5221-7V | 5223-7V |
| | | | White | 5221-7W | 5223-7W |

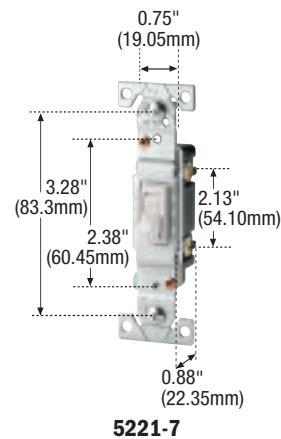

Horsepower Rated for Motor Loads per UL 20

| | 120V/AC | 240V/AC | Max Amps |
|-----|---------|---------|----------|
| 15A | 1/2 HP | 2 HP | 12A |

E-12 Switches

TESTING & CODE COMPLIANCE

- UL 20 Listed, (file no. E18704)
- Meets all CSA requirements, C22.2 111 file no. 10016.

MATERIAL CHARACTERISTICS

Temperature Rating:
-40°C to 65°C.