






G-25 Straight Blade Receptacles



805



2836

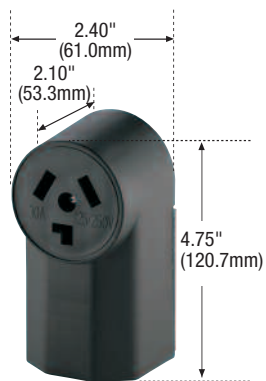

125

TESTING & CODE COMPLIANCE

- UL Listed,
- Receptacles: file no. E15058;
- Plugs: file no. E15012, except S80: file no. E3663.
- NOM Certified.

MATERIAL CHARACTERISTICS

- Plugs: PVC. Flush
- Receptacles: Phenolic;
- Surface Receptacles: PVC.
- Temperature Rating: -20°C (without impact) to 75°C max. continuous, except 2836: -20°C to 60°C.

Commercial Specification Grade Straight Blade Power Devices

**3-Pole, 3-Wire Non-Grounding
NEMA 10-20, 10-30
20A 125/250V
30A 125/250V**

Power Devices

FEATURES

- Heavy gauge galvanized steel mounting strap for corrosion resistance.
- Receptacles for use with copper or aluminum wire.
- Surface receptacles have patented lay-in terminals and accept up to #4 wire.
- Universal plugs include blades for 30A & 50A configurations.
- Surface receptacles 0.75" (19.05mm) and 1.0" (25.4mm) concentric knockouts and adjustable cord clamp allow for wiring from bottom or back.
- Flush receptacles fit one or two gang enclosures.

NEMA 10-20 Rating 20A 125/250V

Receptacles

Description	Color	Catalog No.
Flush	Brown	805B*
	Ivory	805V*

*CSA Certified.

Plug

Description	Color	Catalog No.
Armored PVC	Yellow	2836

NEMA 10-30 Rating 30A 125/250V

Receptacles


Description	Color	Catalog No.
Surface	Black	125
Flush	Brown	38B

Plug

Description	Cord Diameter	Color	Catalog No.
Angle Universal - PVC	0.800" (20.32mm)	Black	S80

Wallplate Guide for Power Devices

Power Device Catalog No.	Wallplate Catalog No.
38B	39CH, 68, 2068, 2168, 93221, 93227, 5068, PJ724, PJ703

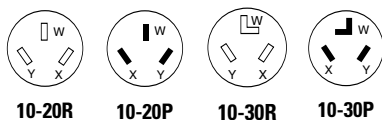

10-20R

10-20P

10-30R

10-30P