

NON-METALLIC • NON-CONDUCTIVE



Installed Gaskets
& NM Cable
Connectors

For Help
in Obtaining
**ENERGY
STAR**
rating



Prevents Air Infiltration in New Construction

Vapor Boxes
for Fans, Fixtures, Devices

A
Arlington

Single Drywall

SCREW-ON Vapor Boxes for Fixtures, Devices

NEW!

NEW CONSTRUCTION

Arlington's non-metallic ONE-BOX™ fan, fixture and device boxes feature built-in flanges with gaskets attached that form a protective barrier against air infiltration, enabling installers to meet local codes where required.

Fast, easy, secure installation in new construction, our vapor boxes mount to wood or steel joists with nails or screws that ship captive.

ONE-BOX Vapor Boxes for Fixtures, Fans and Devices...

- Non-metallic, non-conductive
- For fixtures (round), fan or fixture (bar hanger) and devices (single and multiple gangs)
- No loose parts – ships with mounting screws or captive nails (on facing page) and installed NM cable connectors with gaskets attached
- For new construction with single or double drywall
- UL/CSA Listed

Patented. Other patents pending


for Fixtures

Installation cutaway




All Available with Ground Clip for Canada

NM Cable Connectors with Gasket material already **INSTALLED**

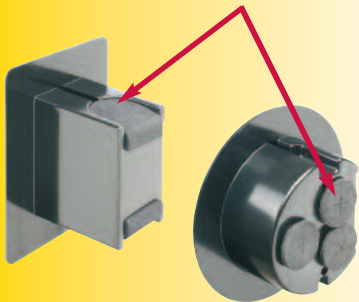

for Devices

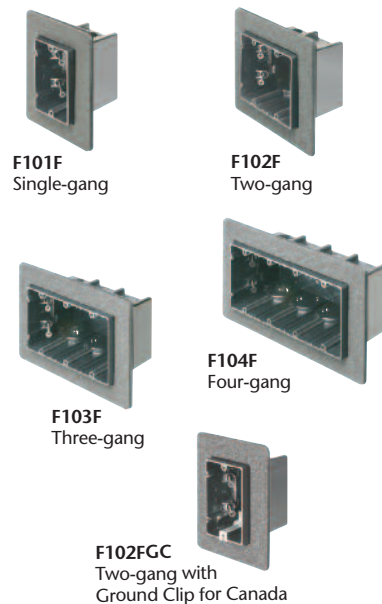

Screw-on Single Drywall

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Vapor Box Size/Use | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|-------------------------|--------------|--------------|
| F426F | 06903 | Round for fixtures | 28.0 | 20 |
| F101F | 12520 | Single-gang for devices | 22.0 | 25 |
| F102F | 06900 | Two-gang for devices | 42.0 | 10 |
| F103F | 06901 | Three-gang for devices | 59.0 | 10 |
| F104F | 06902 | Four-gang for devices | 81.0 | 10 |

Screw-on with Ground Clip for use in Canada (GC suffix)

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Vapor Box Size/Use | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|-------------------------|--------------|--------------|
| F426FGC | 06909 | Round for fixtures | 28.0 | 20 |
| F101FGC | 06905 | Single-gang for devices | 22.0 | 25 |
| F102FGC | 06906 | Two-gang for devices | 42.0 | 10 |
| F103FGC | 06907 | Three-gang for devices | 59.0 | 10 |
| F104FGC | 06908 | Four-gang for devices | 81.0 | 10 |

Includes Robertson head screws



Single Drywall

NAIL-ON Vapor Boxes for Fixtures, Devices

for Fixtures




Nail-on
FN430F
for single drywall




Gasket material
attached to ALL
flanges and knockouts

for Devices

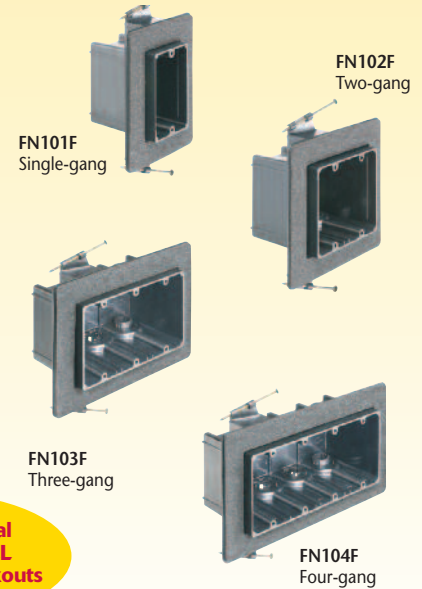

FN430F ships ready to install a FIXTURE
on ceilings with **Single Drywall**

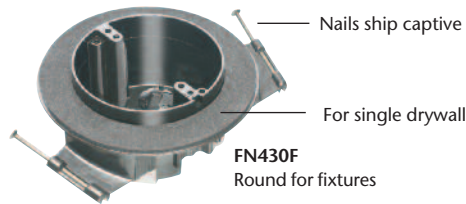


Nail-on Single Drywall

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Vapor Box Size/Use | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|-------------------------|--------------|--------------|
| FN430F | 15100 | Round for fixtures | 30.5 | 20 |
| FN101F | 15130 | Single-gang for devices | 23.0 | 20 |
| FN102F | 15132 | Two-gang for devices | 43.5 | 10 |
| FN103F | 15134 | Three-gang for devices | 63.5 | 10 |
| FN104F | 15136 | Four-gang for devices | 85.3 | 10 |

Voltage Separator

Divides power/low voltage in box



F102D
Voltage separator

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Low Voltage Separator | Unit/Std Pkg |
|---|---------------------------|----------------------------------|--------------|
| F102D | 43544 | Divides power/low voltage in box | 25 |
| Fits these boxes installed w/ single drywall: Two, three, four-gang screw-on F102F, F103F, F104F (and GC styles) | | | |
| Two, three, four-gang nail-on FN102F, FN103F, FN104F (and GC styles) installed with single drywall (only) | | | |

Nail-on with Ground Clip for use in Canada (GC suffix)


| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Vapor Box Size/Use | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|-------------------------|--------------|--------------|
| FN430FGC | 15101 | Round for fixtures | 30.5 | 20 |
| FN101FGC | 15138 | Single-gang for devices | 23.0 | 20 |
| FN102FGC | 15140 | Two-gang for devices | 43.5 | 10 |
| FN103FGC | 15142 | Three-gang for devices | 63.5 | 10 |
| FN104FGC | 15144 | Four-gang for devices | 85.3 | 10 |

Includes Robertson head screws



FN102FGC
Two-gang with
Ground Clip for Canada

Ground Clip for use in Canada



Double Drywall


NAIL-ON Vapor Boxes for Fixtures, Devices

EXISTING CONSTRUCTION



for Fixtures

for Devices

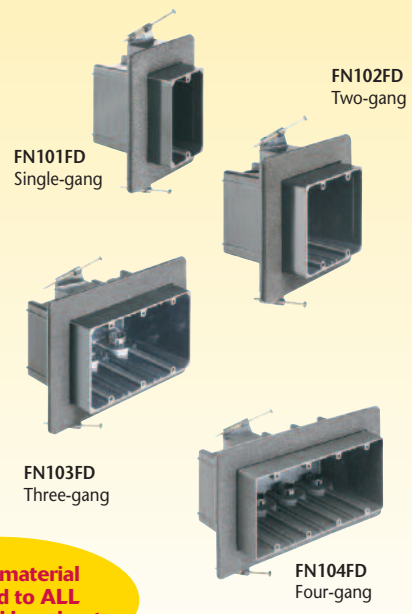


Gasket material attached to ALL flanges and knockouts



Nail-on FN440F for double drywall

FN440F for installing FIXTURES on **Double Drywall** ceilings

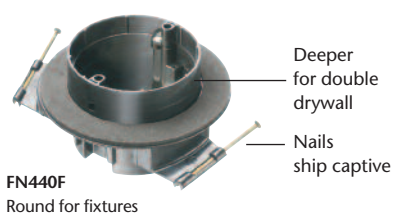

FN440F Round for fixtures

Nail-on Double Drywall

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Vapor Box Size/Use | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|-------------------------|--------------|--------------|
| FN440F | 15120 | Round for fixtures | 39.5 | 20 |
| FN101FD | 15131 | Single-gang for devices | 28.0 | 20 |
| FN102FD | 15133 | Two-gang for devices | 53.0 | 10 |
| FN103FD | 15135 | Three-gang for devices | 77.8 | 10 |
| FN104FD | 15137 | Four-gang for devices | 103.5 | 10 |

For added convenience, these nail-on boxes ship with the nails captive

Nail-on with Ground Clip for use in Canada (GC suffix)

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Vapor Box Size/Use | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|-------------------------|--------------|--------------|
| FN440FGC | 15121 | Round for fixtures | 39.5 | 20 |
| FN101FDGC | 15139 | Single-gang for devices | 28.0 | 20 |
| FN102FDGC | 15141 | Two-gang for devices | 53.0 | 10 |
| FN103FDGC | 15143 | Three-gang for devices | 77.8 | 10 |
| FN104FDGC | 15145 | Four-gang for devices | 103.5 | 10 |

Includes Robertson head grounding screws



Made in USA



Arlington

Side Mount

Side Mount • SCREW-ON Vapor Boxes for Fans/Fixtures

EXISTING CONSTRUCTION

for Fans or Fixtures



Cutaway showing double drywall FB443FD

Gasket material attached to ALL flanges and knockouts

Our economical L-shaped fan/fixture boxes mount securely to joist with a shipped-in-place center screw.

- Styles for single or double drywall
- Vapor barrier in box prevents air infiltration through ceiling or building envelope
- NM Cable Connectors and flange with Gasket material already INSTALLED
- Fan/fixture bracket installation screws ship captive
- UL Ratings: 70 lb fan/200 lb fixture CSA: 50 lb fan or fixture



FB442FD shown with mud cover as shipped



Patented. Other patents pending



Single Drywall FB443F



FB442FD



FB442F



FB443FD

Press on Fan/Fixture Box

Versatile, non-conductive box for new construction



FB426F



FB426F (back shown)

Features and Benefits

- Flange with gasket attached forms a protective barrier against air infiltration
- NM Cable Connectors and flange with Gasket material already INSTALLED
- Includes captive installation screws for fan/fixture bracket
- Gripping tangs press-hold to the joist while you reach for your screwdriver
- UL rated: 70 lb. fan, 200 lb. fixture; CSA rated: 50 lb. fan/fixture

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Description /Style | Unit/Std Pkg |
|----------------|---------------------------|--|--------------|
| FB426F | 12521 | For 1/2" or 5/8" Drywall 16.0 Cu. In. | 25 |

Patented. Other patents pending

Screw-on Side Mount Single Drywall

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Vapor Box Size/Use | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|--------------------|--------------|--------------|
| FB442F | 76220 | Joist Mount | 15.5 | 25 |
| FB443F | 76222 | Fan or Fixture | 18.8 | 25 |

Screw-on Side Mount Double Drywall

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Vapor Box Size/Use | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|--------------------|--------------|--------------|
| FB442FD | 76221 | Joist Mount | 25.0 | 25 |
| FB443FD | 76223 | Fan or Fixture | 28.5 | 25 |

Add suffix "GC" to catalog number when ordering for use in Canada, i.e. FB442FGC, FB442FDGC.

Made in USA



Arlington

For New Construction Plastic Vapor Box with Adjustable Steel Bracket for Fans/Fixtures

Arlington's heavy-duty, non-metallic fan/fixture boxes feature

fully adjustable plated steel brackets that fit joists spaced 16" to 24" o.c.




Just like our vapor boxes for fixtures and devices, these fan/fixture boxes have built-in flanges with gaskets installed that form a protective barrier against air infiltration, so installers can meet residential codes where required.

Best of all, they deliver flush ceiling installations!

Fast, secure installation in new construction, our fan/fixture vapor boxes mount to wood joists with supplied screws.

FBR415F ships ready to install on SINGLE drywall;
FBR425F is for DOUBLE drywall.



FBR415F



FBR425F

- Non-metallic, non-conductive box, with fully adjustable steel bracket
- Position box anywhere along bracket
- Captive fan/fixture bracket installation screws, mud cover, installed NM cable connector, and all gasket material
- UL/CSA Listed




Arlington

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com
©2011 Arlington Industries, Inc.
REV1213/25M



Installation cutaway (single drywall shown)

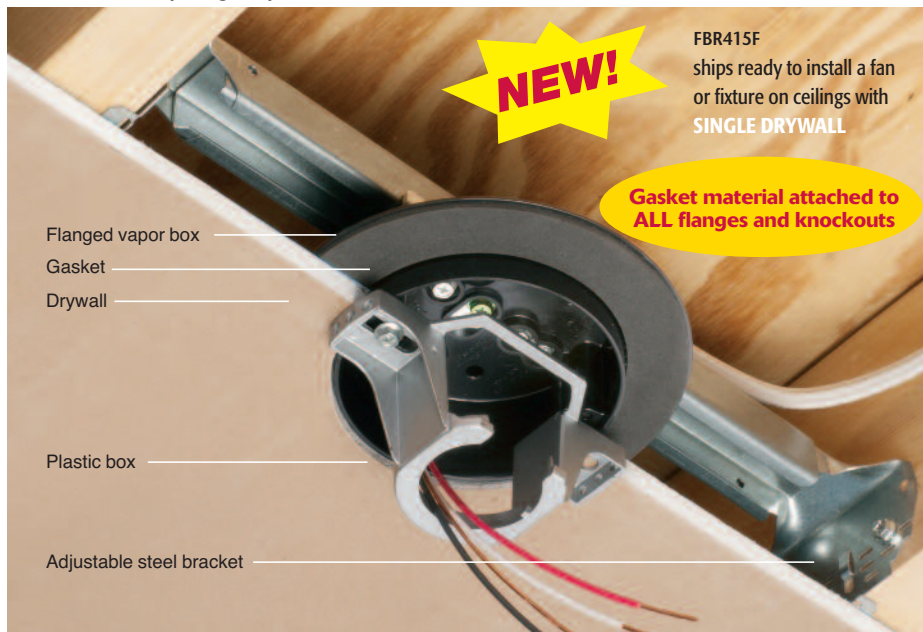


FBR415F, FBR425F...for New Construction



1 Nail 'tooth' to joist to hold bracket in place temporarily.



2 Use supplied screws to secure bracket to joists.



Inside FBR415F box



3 Loosen box screw (provided). Slide box along bracket to position box between joists.



4 Tighten box screw to lock box in position.



5 Remove captive installation screws to install fan/fixture mounting bracket (drywall installation not shown).

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Fan/Fixture Vapor Box Plastic box, adjustable steel bracket | Cubic Inches | Unit/Std Pkg |
|----------------|---------------------------|---|--------------|--------------|
| FBR415F | 72204 | for single drywall ceilings | 18.3 | 5 |
| FBR425F | 72205 | for double drywall ceilings | 27.3 | 5 |

NM Cable Connectors with Gasket material already INSTALLED



UL Fan Rated

70# at 24" o.c.
110# at 16" o.c.

UL Fixture Rated

90# at 24" o.c.
150# at 16" o.c.

Canadian Std. Rated

50# Fan/Fixture 16"-24" o.c.

Distributed by