

## Dieless Crimper Connector Brand Uses, UL Classified & CSA Certified

CONNECTOR/ GREENLEE CRIMPER NO.	Dual Rated Aluminum Sleeves	Dual Rated Aluminum Lugs	Copper Sleeves	Copper Lugs	Aluminum Pin Connector	Aluminum Offset Connector	Copper Pigtail Adapter
ANDERSON 1989 & 1990	VACS	VACL	VHS/VHSS	VHCL	CEP	CEPO	-
BLACKBURN® 1989 & 1990	ASP	ATL	CSP/CU	CTL-2, CTL CTL-L/LCN	-	-	-
BURNDY™ 1989 & 1990	YS-A	YA-A YA-ATN	YS/YS-L	YA/YA-L/YA-2L YA-2LN/YA-2N YA-L-TC/YA-L-2TC	AYP	AYPO	-
ILSCO 1989	AS	ACL/ACN 2ACL/2ACN	CT/CTL	CRA/CRB CRA-L/CRB-L CRA-2L/CRB-2L	ACM	ACO	-
1990	AS	ACL/ACN 2ACL/2ACN	CT/CTL	CRA/CRB CRA-L/CRB-L CRA-2L/CRB-2L	ACM #6 AWG- 1000 MCM AL	ACO 2/0 AWG- 1000 MCM AL	CPM
T&B● 1989	60507-60571	60106-60172 60230-60273	54506-54518 54806-54818	54106-54187 54206-54287 54906-54918 54854-54876	-	-	-
1990	60507-60584	60106-60184 60230-60284	54506-54582 54806-54882	54106-54128 54206-54228 54906-54928 54854-54882	-	-	-
TELEDYNE PENN-UNION 1990	PIK	BLUA	BCU BBCU	BLU BBLU	TP	TPO	-
WIRE SIZE 1989	#6 AWG- 4/0 AWG	250-500 MCM Copper or Alum.	#4 AWG-500 MCM Copper		#6 AWG- 500 MCM Aluminum	2/0 AWG- 500 MCM Aluminum	#6 AWG- 500 MCM Aluminum
1990	#6 AWG- 4/0 AWG	250-1000 MCM Copper or Alum.	#4 AWG-1000 MCM Copper		#6 AWG- 750 MCM Aluminum	2/0 AWG- 750 MCM Aluminum	-
NO. CRIMPS♦	1	2	1		1	1	1

■ When used with standard, concentric, compressed or compact stranded copper and aluminum conductors.

● Connector size within rated capacity of individual crimper.

♦ When crimping with Greenlee 1989 or 1990 crimper, use the number of crimps listed in the column instead of number provided with the connector.

Blackburn® is a registered trademark of Thomas & Betts.

## Utility Dieless Crimping Tool



Cat. No.	UPC No.	Description
44999	44999	Utility Dieless Crimping Tool
32891	32891	Replacement Pressure Test Kit includes 30 Test Slugs and Gauge

- Self-contained hydraulic crimper/press designed to crimp compression sleeves and lugs in underground applications.
- Dieless crimping head, no dies to lose or replace.
- Automatic pressure setting, easy to use.
- Two speed pump for rapid ram advance, 15 ton (133.4 kN) maximum crimping force.
- Hinged head opens for easy loading and unloading.
- Head rotates 180°.
- Includes Pressure Test Kit and metal carrying case.


### SPECIFICATIONS

**Capacity:** Copper - 1/0 - 1000 MCM (50 - 500 mm<sup>2</sup>)  
Aluminum - 1/0 - 1000 MCM (50 - 500 mm<sup>2</sup>)

For use with connectors up to a maximum of 1.895" (48 mm) diameter

**Weight:** 16.5 lbs. (7.5 kg)

## K-Series Crimping Tool 8-1/0 AWG

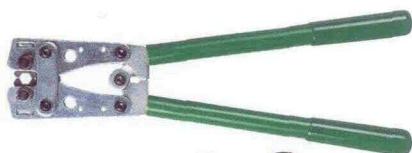

Cat. No.	UPC No.	Description
K05-1GL	02624	K-Series Crimping Tool
K05-1SPGL	02625	K-Series Crimping Tool with ratchet mechanism that releases only after full crimp cycle is completed

- Crimps smaller copper connectors.
- UL classified and CSA certified with Anderson, Blackburn, Burndy, ILSCO, Panduit, Thomas & Betts and Penn-Union copper connectors.
- Small, lightweight, easy to handle.
- Easy to get in tight locations.
- Color-coded hexagonal rotating dies.

### SPECIFICATIONS

**Capacity:** 8 AWG - 1/0 AWG Cu

**Length:** 15.4" (390 mm)

**Weight:** 2.4 lbs. (1.1 kg)