





# Straight Blade Receptacles TradeMaster® Receptacles


15A, 125V

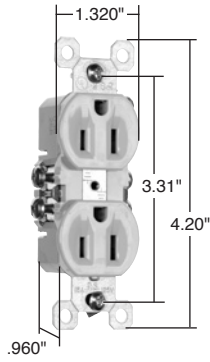


3232I

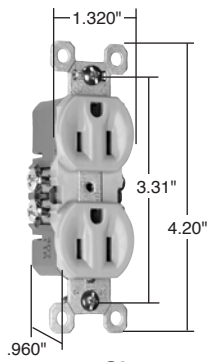

3232SI



3232IMH

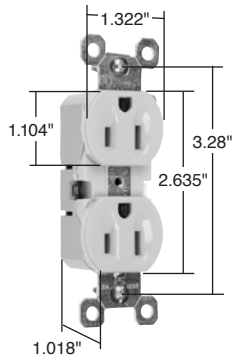

880I

### Features

- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Low profile face.
- Traditional contoured face. (3232 models.)
- Self-grounding models provide automatic ground clip.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				UL498	C22.2 No. 42
<b>Duplex Receptacles – Grounding</b>					
3232I*	15 125	Ivory	5-15R	•	•
3232W*	15 125	White	5-15R	•	•
3232*	15 125	Brown	5-15R	•	•
3232BK	15 125	Black	5-15R	•	•
3232LA*	15 125	Light Almond	5-15R	•	•
<b>Self-Grounding Duplex Receptacles</b>					
3232SI	15 125	Ivory	5-15R	•	•
3232SW	15 125	White	5-15R	•	•
3232S	15 125	Brown	5-15R	•	•
3232SLA	15 125	Light Almond	5-15R	•	•
<b>4 Terminal, Screws In</b>					
3232I4	15 125	Ivory	5-15R	•	•
3232W4	15 125	White	5-15R	•	•
32324	15 125	Brown	5-15R	•	•
<b>Duplex Receptacles – Without Ears</b>					
3232IMH	15 125	Ivory	5-15R	•	•
3232WMH	15 125	White	5-15R	•	•
3232MH	15 125	Brown	5-15R	•	•

\*Available in bulk packs of 150. Add "U" to end of Catalog Number. Example: 3232LAU.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				UL498	C22.2 No. 42
<b>8 Hole Push Wire Without Terminal Screws</b>					
880I	15 125	Ivory	5-15R	•	•
880W	15 125	White	5-15R	•	•
880	15 125	Brown	5-15R	•	•
<b>8 Hole Push Wire – Without Ears Without Terminal Screws</b>					
880IMH	15 125	Ivory	5-15R	•	•
880WMH	15 125	White	5-15R	•	•
880MH	15 125	Brown	5-15R	•	•