

RAB LIGHTING GT500R



JOB NAME: _____
DATE: _____
TYPE: _____

DESCRIPTION

Gotcha Sensor with two weatherproof, corrosionproof floodlights and universal CU4 cover plate. New vandal resistant lens Lamps not supplied.

SPECIFICATIONS

Detector Sensitivity:

Adjustable from 100% to 50%

Floodlights:

Made of tough, corrosion-resistant polycarbonate. For extra or replacement floodlights, order cat# TUFFY in your choice of color. Accepts PAR-38 lamps, medium base, 150 watts max. Lamps not included.

Photoelectric Control:

Deactivates lights during daylight

Power Consumption:

1 watt

Sensor Housing:

Made of tough, corrosion resistant polycarbonate

Surge Protection:

Withstands up to 6000 volts

Time Adjustment:

10 seconds to 5 minutes

UL Listing:

Suitable for wet locations.

Voltage:

120 volts AC 60 Hz.

Wall Switch Manual Override:

Two flip logic prevents activation by momentary power outages. Override resets to auto after 6 hours or at dawn. No extra wiring needed.

Detection:

110° view

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws


Color:

Black


Weight:

1.94

DIMENSIONS

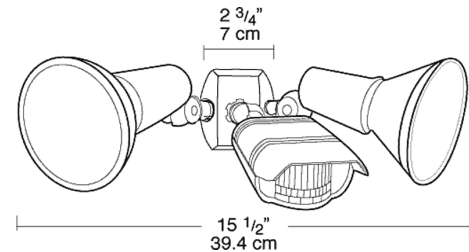

DETECTION PATTERN

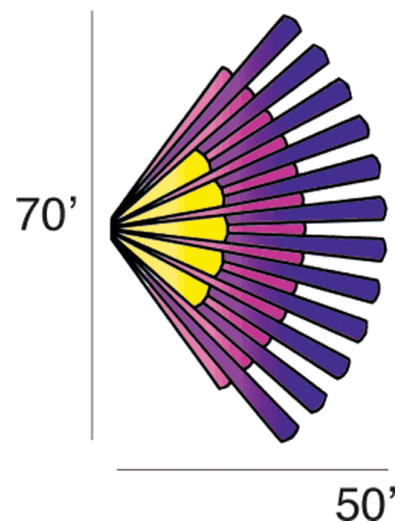

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2008