

# ReneSola

## LED TUBE SERIES

### FEATURES

- Integrated thermal design
- The tube is 1/3 aluminum preventing any product damage or impairment
- Environmentally friendly; mercury free
- Energy savings up to 45% compared to traditional T8 Fluorescent products
- Longer lamp life usage compared to T8 Fluorescent products
- Consistent light output
- UL & DLC listed
- Five year warranty


### APPLICATION

Factories, Workshops, Warehouses, Commercial



### Technical Specification

Part No.	Watt. (W)	Lumens (lm)	CCT(K)	CRI(Ra)	Voltage	Size (inch)	Weight (lb)	PF	Base Type
RT8010O0101	10	1000	3000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
RT8010O0102	10	1000	4000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
RT8010O0104	10	1000	5000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
RT8018O0101	18	1800	3000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
RT8018O0102	18	1800	4000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
RT8018O0104	18	1800	5000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
RT8018O0109	18	1800	3000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
RT8018O0110	18	1800	4000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
RT8018O0111	18	1800	5000	80	AC100-277V 50/60Hz	0.09*L4	0.68	0.9	G13
LED Brand	OWN								
Driver Brand	OWN								
View Angle (°)	130								
Working Temperature (°C)	-20~+50								
Dimmable	NO								
Lifetime (H)	50000								
Suitable Location	Dry								

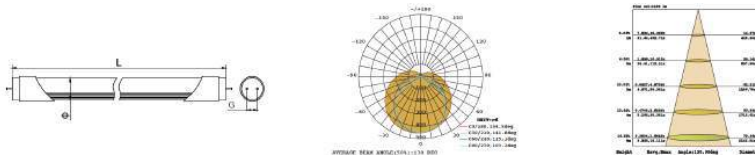

### Mounting Method

